

NOTE :
ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK.
HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS , ACCESSORIES & COATINGS SHOWN ON THIS DRAWING


FITTING SCHEDULE

- A= 4"Ø NPT
- B= 2"Ø NPT (FTG. FOR LEAK DETECTION)
- C= 18"Ø LOOSE BOLT MAN WAY (PRIMARY EMERGENCY VENT)
- D= 8"Ø FULL COUPLING (SECONDARY EMERGENCY VENT)

GENERAL NOTES

CAPACITY : 6000 GALLONS
TYPE : I 360 DOUBLE WALL, ABOVEGROUND, HEAVY DUTY SKID
NO. REQ. : (1)
MATERIAL : MILD CARBON STEEL
TEST : 5 P.S.I.
MIN. GAUGE OR THICKNESS (PER U.L. 142):

INNER HEADS : 7 GA. OUTER HEADS : 10 GA.
INNER SHELL : 7 GA. OUTER SHELL : 10 GA.
PAINT :
 INTERIOR : NONE
 EXTERIOR : RED PRIMER
CONSTRUCTION : FLAT FLANGED HEADS, LAP WELD ALL EXTERIOR SEAMS ONLY
APPROVED LABELS : U.L. 142
OPERATING PRESSURE- ATMOSPHERIC

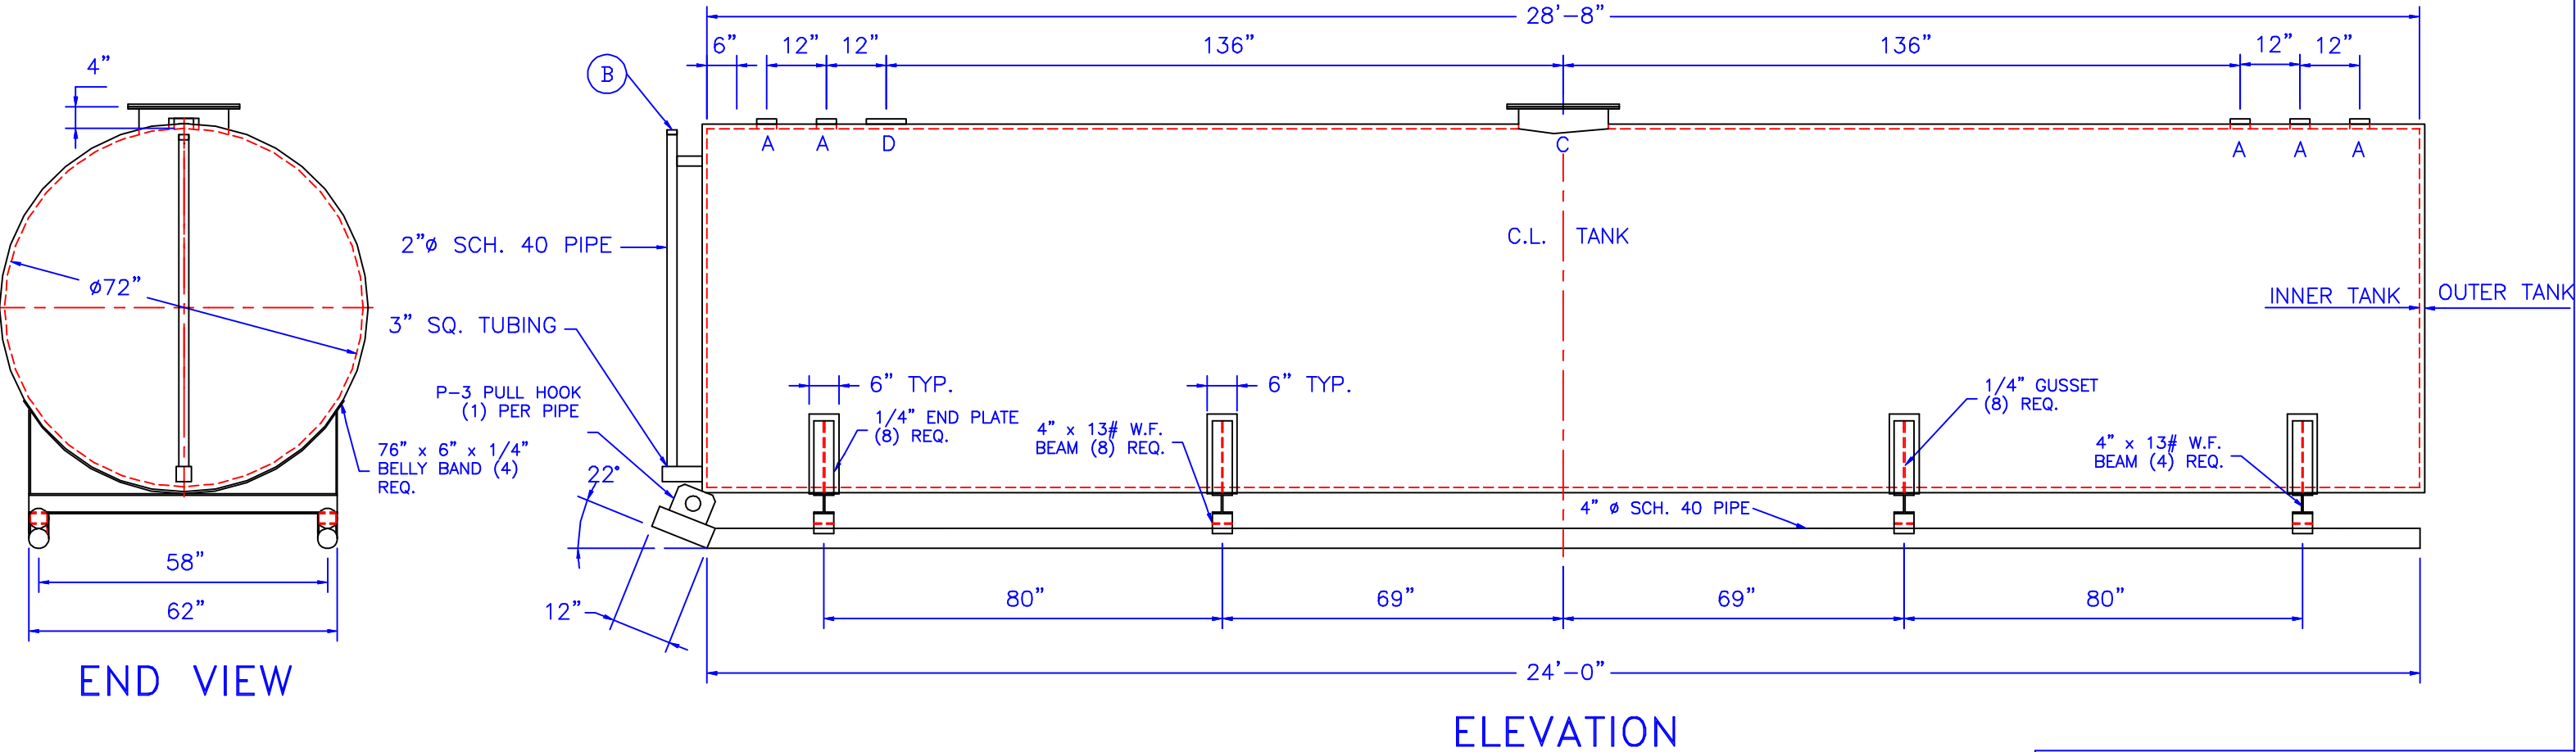

REVISIONS				
 HIGHLAND TANK WFG. CO. Highland Tank				
6000 GALLON ABOVEGROUND HORIZONTAL DOUBLE WALL TYPE I 360 HEAVY DUTY SKID				
CUSTOMER:				
PROJECT:				
QUOTE NO:				CHK'D BY:
SCALE: 3/8"=1'-0"	DATE:	DWG. BY:	DWG. NO.: 06000SKHDDW72	