


NOTE :
ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK.
HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS , ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

FITTING SCHEDULE
A= 2 ∅ NPT
B= 3 ∅ NPT (PRIMARY EMERGENCY VENT)
C= 4 ∅ NPT
D= 2 ∅ NPT (FTG. FOR LEAK DETECTION)
E= 3 ∅ NPT (SECONDARY EMERGENCY VENT)

GENERAL NOTES
CAPACITY : 300 GALLONS
TYPE : DOUBLE WALL TYPE I 360 °, ABOVEGROUND, LIGHT DUTY SKID
NO. REQ. :
MATERIAL : MILD CARBON STEEL
TEST : 5 P.S.I.
MIN. GAUGE OR THICKNESS (PER U.L. 142) :
INNER HEADS : 10 GA. OUTER HEADS : 10 GA.
INNER SHELL : 10 GA. OUTER SHELL : 10 GA.
PAINT :
 INTERIOR : NONE
 EXTERIOR : RED PRIMER
CONSTRUCTION : FLAT FLANGED HEADS, LAP WELD ALL EXTERIOR SEAMS ONLY
APPROVED LABELS : U.L. 142
OPERATING PRESSURE— ATMOSPHERIC

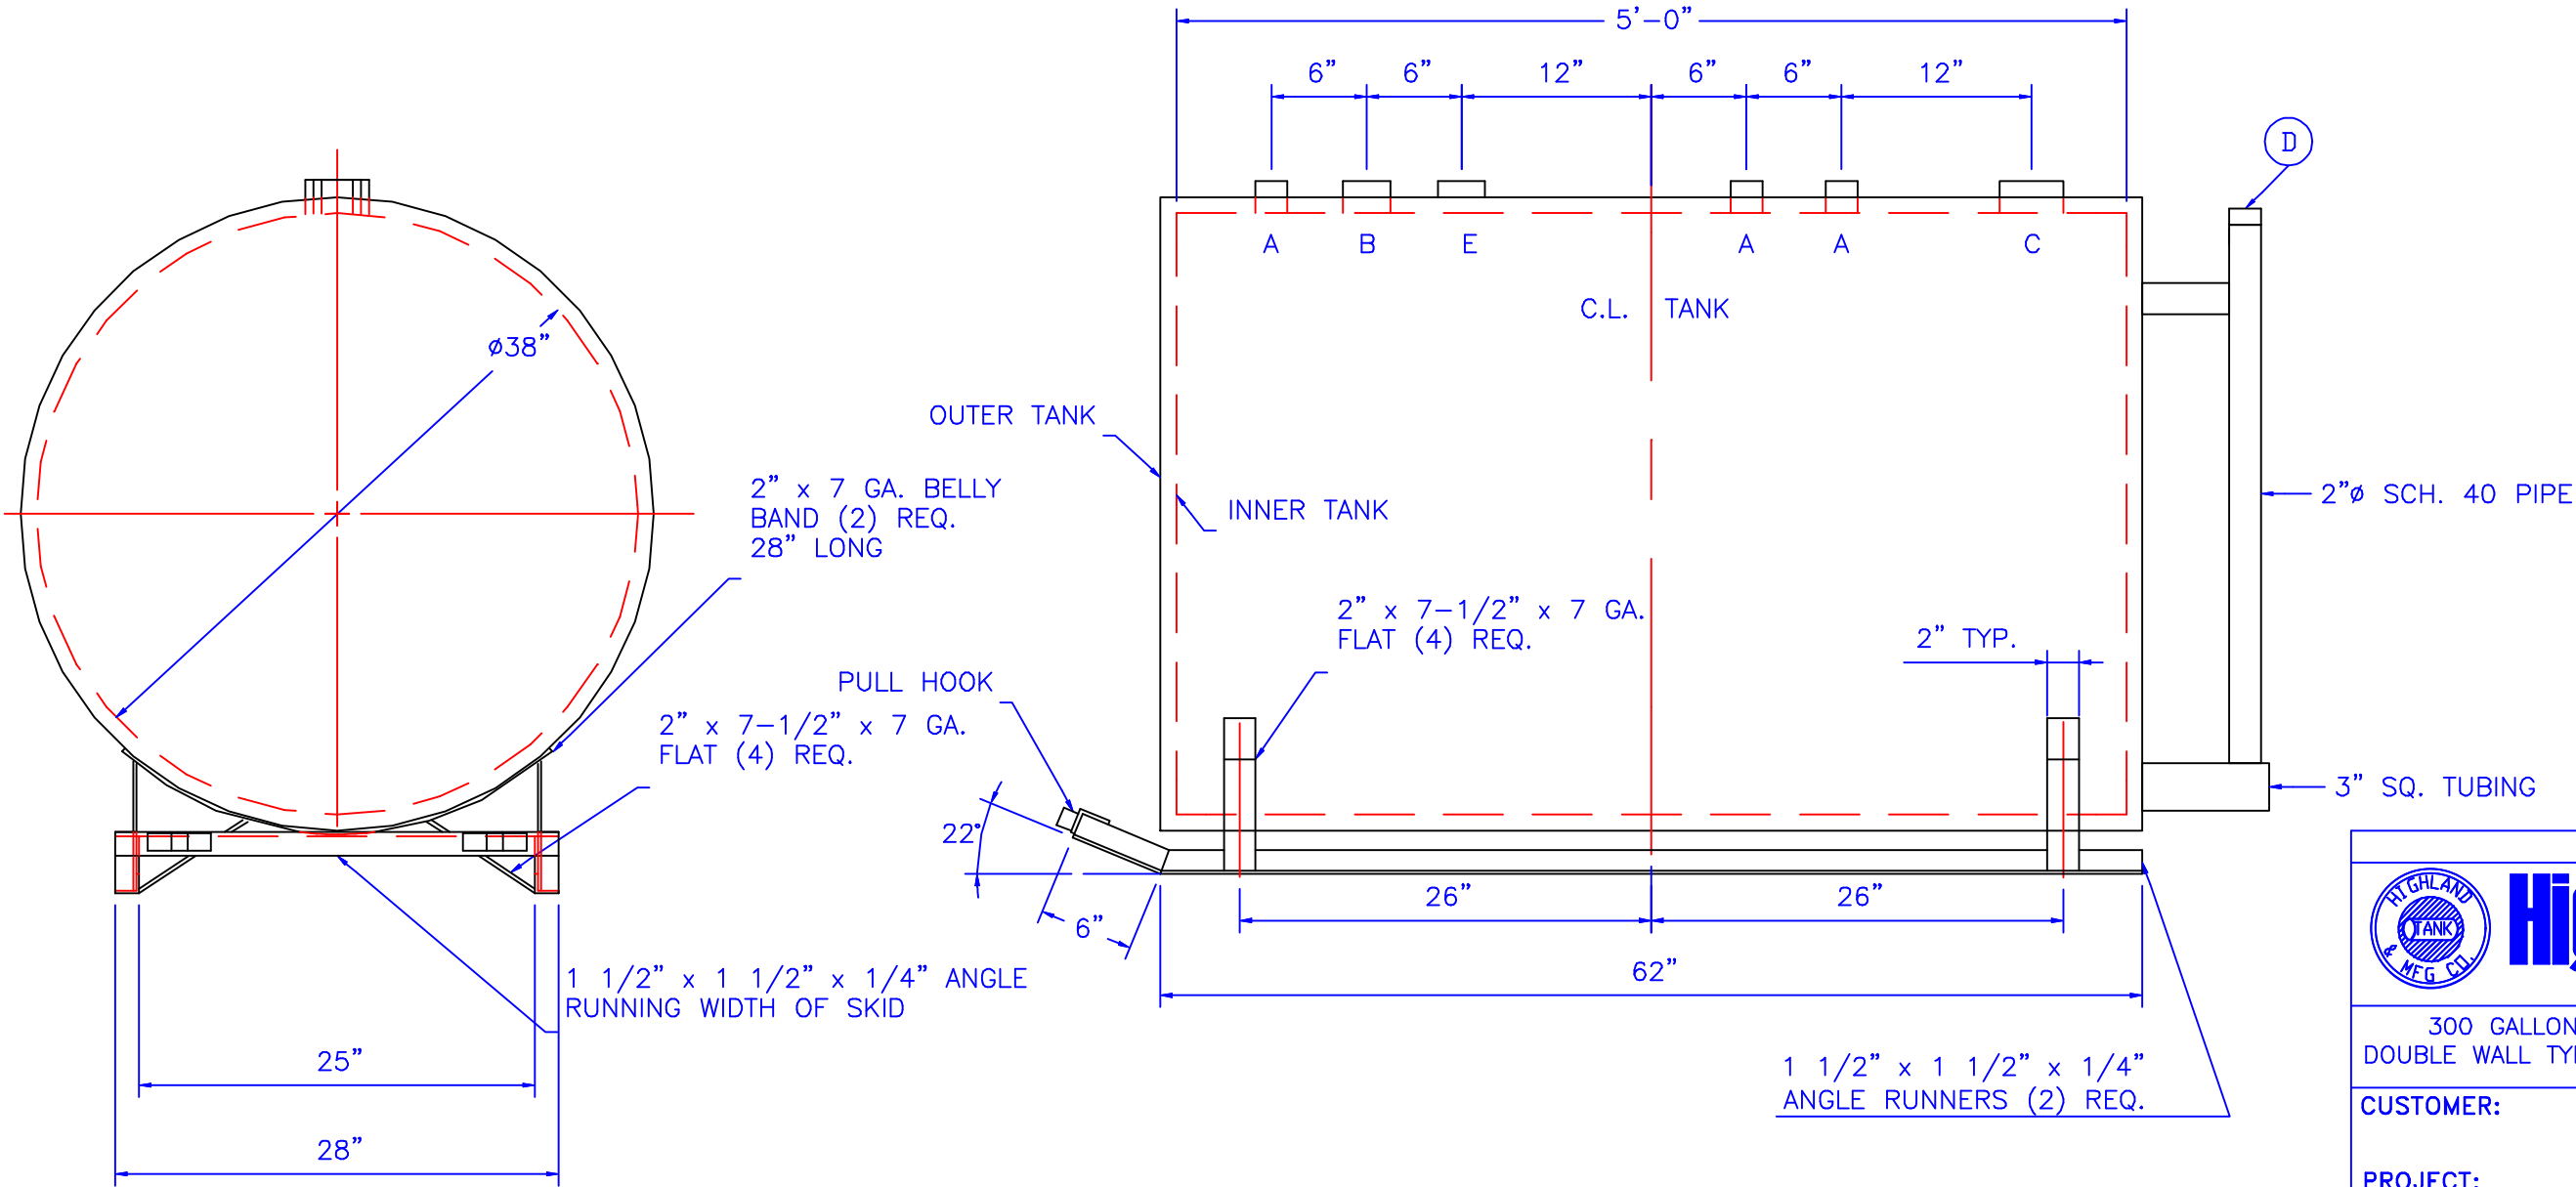

REVISIONS				
 HIGHLAND TANK & MFG. CO. Highland Tank				
300 GALLON ABOVEGROUND HORIZONTAL DOUBLE WALL TYPE I 360 LIGHT DUTY SKID TANK				
CUSTOMER:				
PROJECT:				
QUOTE NO:				CHK'D BY:
SCALE: 1"=1'-0"	DATE:	DWG. BY:	DWG. NO.: 00300SKLDDW10GA	