
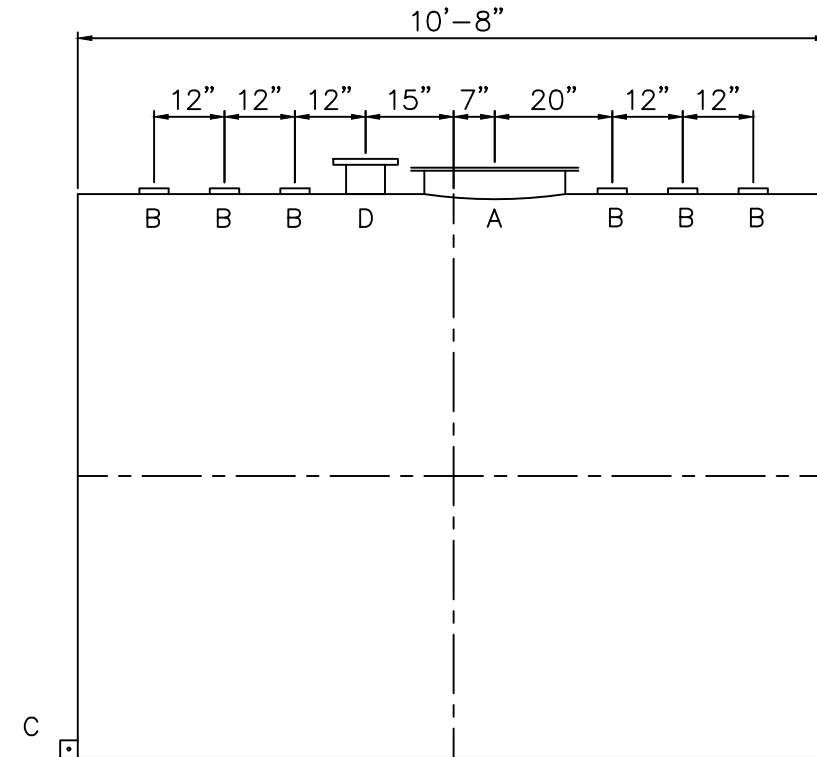


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK®. HIGHLAND TANK® SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.

SHIPPING LUGS AS NEEDED

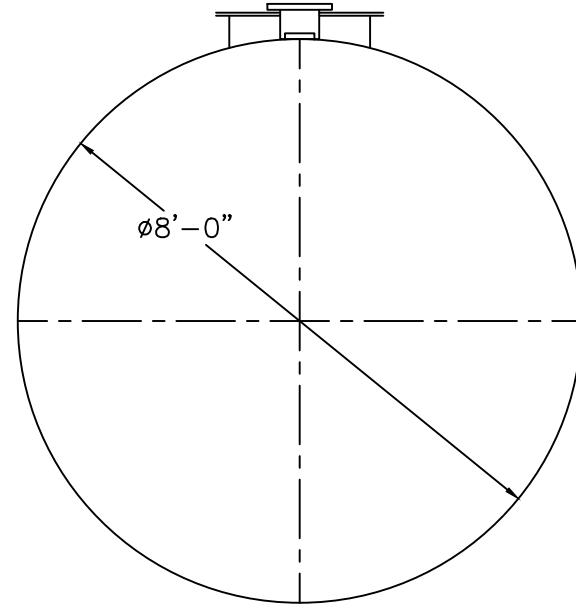

<u>DESIGN DATA</u>
CAPACITY – 4000 GAL
TYPE – SINGLE WALL
NO. REQ. – –
OPERATING PRESSURE –ATMOSPHERIC
SPECIFIC GRAVITY = 1.0
TANK MATERIAL –MILD CARBON STEEL
THICKNESS – HEADS: 5/16”
THICKNESS – SHELL: 1/4”
CONSTRUCTION –LAP WELD OUTSIDE ONLY –
TANK TEST –5 PSIG –
INT. FINISH – NONE –
EXT. FINISH –SHOP PRIMER –
LABEL – UL 142

<u>LEGEND</u>	
A	24"Ø TIGHT BOLT MANWAY w/ 1" FIBREFLEX GASKET
B	4" FITTING
C	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)
D	6" 150# FFSO FLANGE – PRIMARY EMERGENCY VENT USE
E	–
F	–

		Highland Tank	
UNLESS NOTED, TOLERANCES ARE +/- 1"			
4,000 GAL 96"Ø SW AG HORIZONTAL			
CUSTOMER:			
PROJECT:			
QUOTE NO:		CHK'D BY:	
SCALE: 3/8"=1'-0"	DATE:	DWG. BY:	DWG. NO.: 04000AHSW96